

Optical vortices of slow light using a tripod scheme

J Ruseckas, A Mekys and G Juzeliūnas

Institute of Theoretical Physics and Astronomy, Vilnius University, A Goštauto 12, Vilnius 01108, Lithuania

E-mail: julius.ruseckas@tfai.vu.lt, algirdas.mekys@ff.vu.lt and gediminas.juzeliunas@tfai.vu.lt

Received 29 November 2010, accepted for publication 14 February 2011

Published 27 April 2011

Online at stacks.iop.org/JOpt/13/064013

Abstract

We consider propagation, storing and retrieval of slow light (probe beam) in a resonant atomic medium illuminated by two control laser beams of larger intensity. The probe and two control beams act on atoms in a tripod configuration of light–matter coupling. The first control beam is allowed to have an orbital angular momentum (OAM). Application of the second vortex-free control laser ensures the adiabatic (lossless) propagation of the probe beam at the vortex core where the intensity of the first control laser goes to zero. Storing and release of the probe beam is accomplished by switching off and on the control laser beams leading to the transfer of the optical vortex from the first control beam to the regenerated probe field. A part of the stored probe beam remains frozen in the medium in the form of atomic spin excitations, the number of which increases with increasing intensity of the second control laser. We analyze such losses in the regenerated probe beam and provide conditions for the optical vortex of the control beam to be transferred efficiently to the restored probe beam.

Keywords: slow light, electromagnetically induced transparency, light storage, orbital angular momentum

(Some figures in this article are in colour only in the electronic version)

1. Introduction

Over the last decade there has been a great deal of activity in slow [1–5], stored [6–18] and stationary [19–25] light. It was demonstrated that a resonant weak pulse of light (to be referred to as the probe light) can propagate as slowly as several of tens of meters per second [1] in an atomic medium driven by a stronger (control) laser beam. The application of the control laser beam makes the resonant and opaque medium transparent for the probe beam due to the electromagnetically induced transparency (EIT) [26–30], both beams making a Λ configuration of atom–light coupling. The EIT can be used not only to slow down light pulses dramatically [1–5], but also to store them [7, 8, 13, 15–18] in atomic gases. The storage and release of probe pulses has been accomplished [7, 8, 13, 15–18] by switching off and on the control laser [6]. The slow and stored light can be applied to reversible quantum memories [6, 9, 10, 13, 29–33] and, in

the case of moving media [34–41], also to rotational sensing devices.

The orbital angular momentum (OAM) [42, 43] provides additional possibilities in manipulating the slow light. The OAM represents a new degree of freedom which can be exploited in quantum computation and quantum information storage [43]. Most of the previous studies on vortex slow light have concentrated on situations in which the incident probe beam carries OAM [44, 45, 41, 46, 47].

Here we consider another situation in which the incident probe beam does not have an optical vortex, yet it gains OAM when retrieved. For this purpose one of the control laser beams is assumed to have an optical vortex during either the storage or retrieval of the slow light. The intensity of such a control beam goes to zero at the vortex core, potentially leading to absorption losses of the probe beam in this area. To avoid the losses an extra control laser without an optical vortex is used. This makes a more complex tripod scheme of atom–light coupling [48–59]. The total intensity of the control lasers

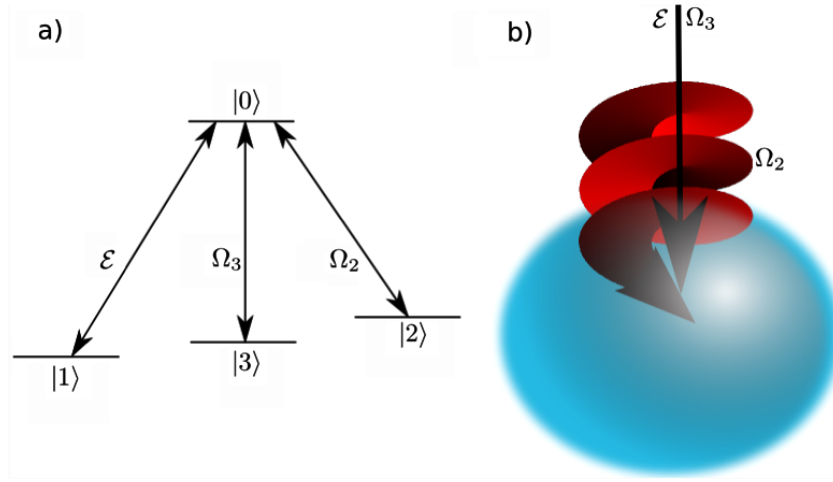


Figure 1. Light induced transitions in the cloud of cold atoms involving a tripod configuration of the internal atomic states.

is then non-zero at the vortex core of the first control laser, preventing the absorption losses. Subsequently we analyze additional losses appearing because a part of the stored probe beam remains frozen in the atomic cloud in the form of spin excitations during the exchange of the optical vortex between the control laser and the regenerated slow light. The number of such frozen excitations increases with increasing intensity of the second control laser. We provide conditions for the optical vortex of the control beam to be transferred efficiently to the restored probe beam.

2. Equations for the probe beam

In this section we shall derive general equations for the propagation of the probe beam in an ensemble of tripod atoms. In doing so we shall not make use of the usual slowly varying amplitude approximation [55, 57, 56] for the spatial coordinates in the direction perpendicular to the light propagation. This will make it possible to analyze situations where the control and/or probe beams have OAM.

2.1. Coupled equations for the probe beam and atoms

Let us consider an ensemble of tripod-type atoms characterized by three hyperfine ground levels 1–3, as well as an electronic excited level 0 (figure 1). The translational motion of atoms is represented by a four component column operator $\Psi(\mathbf{r})$, where the components $\Psi_1(\mathbf{r}, t)$, $\Psi_2(\mathbf{r}, t)$, $\Psi_3(\mathbf{r}, t)$, and $\Psi_0(\mathbf{r}, t)$ are the field operators describing the center of mass motion in the four internal atomic states. The quantum nature of the atoms comprising the medium will determine whether these field operators obey Bose–Einstein or Fermi–Dirac commutation relations. The atoms interact with three light fields in a tripod configuration of atom–light coupling [48, 53, 55–57]. Specifically, two strong classical control lasers induce transitions $|2\rangle \rightarrow |0\rangle$, $|3\rangle \rightarrow |0\rangle$ and a weaker quantum probe field drives a transition $|1\rangle \rightarrow |0\rangle$, as shown in figure 1.

The electric field of the probe beam is

$$E(\mathbf{r}, t) = \hat{e} \sqrt{\frac{\hbar\omega}{2\varepsilon_0}} \mathcal{E}(\mathbf{r}, t) e^{-i\omega t} + \text{H.c.}, \quad (1)$$

where $\omega = ck$ is the central frequency of the probe photons, $\mathbf{k} = \hat{z}k$ is the wavevector, and $\hat{e} \perp \hat{z}$ is the unit polarization vector. This field can be considered to be either a quantum operator or a classical variable. We have chosen the dimensions of the electric field amplitude \mathcal{E} to be such that its squared modulus represents the number density of probe photons. The probe field is assumed to be quasi-monochromatic, so the amplitude $\mathcal{E}(\mathbf{r}, t)$ changes little over the time of an optical cycle and thus obeys the following equation:

$$\left(\partial_t - i \frac{c^2}{2\omega} \nabla^2 - i \frac{\omega}{2} \right) \mathcal{E} = ig \Phi_1^\dagger \Phi_0, \quad (2)$$

where we have introduced the slowly varying atomic field operators $\Phi_1 = \Psi_1 e^{i\omega_1 t}$, $\Phi_2 = \Psi_2 e^{i(\omega_1 + \omega - \omega_{c2}) t}$, $\Phi_3 = \Psi_3 e^{i(\omega_1 + \omega - \omega_{c3}) t}$ and $\Phi_0 = \Psi_0 e^{i(\omega_1 + \omega) t}$, with $\hbar\omega_1$ being the energy of the atomic ground state 1, ω_{c2} and ω_{c3} being the frequencies of the control fields. The parameter $g = \mu\sqrt{\omega/2\varepsilon_0\hbar}$ featured in equation (2) characterizes the strength of coupling of the probe field with the atoms, μ being the dipole moment of the atomic transition $|1\rangle \rightarrow |0\rangle$. Note that, unlike in the usual treatment of slow light, we have retained the second-order derivative ∇^2 in the equation of motion (2). This allows one to account for the fast changes of \mathcal{E} in a direction perpendicular to the wavevector \mathbf{k} , i.e., in the xy plane. Therefore our analysis can be applied to twisted beams of light $\mathcal{E}(\mathbf{r}, t) \sim \exp(i l \varphi)$ carrying an OAM $\hbar l$ per photon.

In the following we shall make use of a semi-classical picture in which both the electromagnetic and matter field operators are replaced by c numbers. The equations for the matter fields are then

$$i\partial_t \Phi_1 = -g\mathcal{E}^* \Phi_0 \quad (3)$$

$$i\partial_t \Phi_0 = (\omega_{01} - i\gamma) \Phi_0 - \Omega_{c2} \Phi_2 - \Omega_{c3} \Phi_3 - g\mathcal{E} \Phi_1 \quad (4)$$

$$i\partial_t\Phi_2 = \omega_{21}\Phi_2 - \Omega_{c2}^*\Phi_0 \quad (5)$$

$$i\partial_t\Phi_3 = \omega_{31}\Phi_3 - \Omega_{c3}^*\Phi_0. \quad (6)$$

Here Ω_{c2} and Ω_{c3} are the Rabi frequencies of control lasers driving the transitions $|2\rangle \rightarrow |0\rangle$ and $|3\rangle \rightarrow |0\rangle$; γ is the decay rate of the excited level; $\omega_{21} = \omega_2 - \omega_1 + \omega_{c2} - \omega$ and $\omega_{31} = \omega_3 - \omega_1 + \omega_{c3} - \omega$ are frequencies of the electronic detuning from the two-photon resonances, $\omega_{01} = \omega_0 - \omega_1 - \omega$ is the frequency of the electronic detuning from the one-photon resonance. In writing equations (3)–(6) we used the rotating wave approximation for the atom–light coupling, and neglected the terms containing atomic mass m , since from now on we are not interested in the effects due to the atomic motion: the terms containing atomic mass m would be important in equations (3)–(6) for the description of the light-dragging effects [36, 37, 39–41]. Furthermore we assumed that the trapping potentials for an atom in the electronic state j ($j = 1-3, 0$) are position independent and hence can be omitted.

2.2. Equation for the of probe beam

To analyze the atomic dynamics it is convenient to introduce the bright and dark states of the atomic center of mass motion

$$\Phi_B = \Omega_c^{-1}(\Omega_{c2}\Phi_2 + \Omega_{c3}\Phi_3), \quad (7)$$

$$\Phi_D = \Omega_c^{-1}(\Omega_{c3}^*\Phi_2 - \Omega_{c2}^*\Phi_3), \quad (8)$$

where

$$\Omega_c = \sqrt{|\Omega_{c2}|^2 + |\Omega_{c3}|^2} \quad (9)$$

is the total Rabi frequency. It is the wavefunction Φ_B which is featured in the equation of motion (4) for the excited state wavefunction. On the other hand, the dark state is not coupled directly to the excited level 0. The original fields Φ_2 and Φ_3 can be expressed through Φ_B and Φ_D as

$$\Phi_2 = \Omega_c^{-1}(\Omega_{c2}^*\Phi_B + \Omega_{c3}\Phi_D), \quad (10)$$

$$\Phi_3 = \Omega_c^{-1}(\Omega_{c3}^*\Phi_B - \Omega_{c2}\Phi_D). \quad (11)$$

Initially the atoms are in the ground level 1 and the Rabi frequency of the probe field is considered to be much smaller than Ω_c . Consequently one can neglect the last term in equation (3) that causes depletion of the ground level 1, giving $i\partial_t\Phi_1 = 0$. If the atoms in the internal ground state 1 form a BEC, its wavefunction $\Phi_1 = \sqrt{n}\exp(iS_1)$ represents an incident variable determined by the atomic density n and the condensate phase S_1 . The latter phase will not play an important role in our subsequent analysis, since we are not interested in the effects due to the condensate dynamics.

Suppose the control and probe beams are tuned close to the two-photon resonance. Application of such laser beams causes electromagnetically induced transparency (EIT) in which the transitions $|2\rangle \rightarrow |0\rangle$, $|3\rangle \rightarrow |0\rangle$ and $|1\rangle \rightarrow |0\rangle$ interfere destructively preventing population of the excited state 0. The adiabatic approximation is obtained neglecting the excited state population in equation (4), giving

$$\Phi_B = -g\frac{\Phi_1}{\Omega_c}\mathcal{E}. \quad (12)$$

When the adiabatic approximation is valid, the bright and dark states are coupled weakly. Therefore, combining equations (5) and (6) and neglecting the dark state contribution Φ_D , we arrive at the equation for the bright state wavefunction

$$i\partial_t\Phi_B = \delta\Phi_B - \Omega_c\Phi_0, \quad (13)$$

where

$$\delta = \omega_{21}|\xi_2|^2 + \omega_{31}|\xi_3|^2 - i(\xi_2\partial_t\xi_2^* + \xi_3\partial_t\xi_3^*) \quad (14)$$

is the two-photon frequency mismatch, with

$$\xi_2 = \Omega_{c2}/\Omega_c, \quad \xi_3 = \Omega_{c3}/\Omega_c. \quad (15)$$

The derivation of equation (13) can be found in more detail in our earlier work [60] on the light induced gauge potentials for the Λ -type atoms. Equation (13) relates Φ_0 to the bright state Φ_B as

$$\Phi_0 = \Omega_c^{-1}(-i\partial_t + \delta)\Phi_B. \quad (16)$$

Finally, equations (2), (12) and (16) provide a closed equation for the electric field amplitude \mathcal{E} :

$$\left(\partial_t - i\frac{c^2}{2\omega}\nabla^2 - i\frac{\omega}{2}\right)\mathcal{E} = -i\frac{g^2\Phi_1^*}{\Omega_c}(-i\partial_t + \delta)\frac{\Phi_1}{\Omega_c}\mathcal{E}. \quad (17)$$

This equation applies a wide variety of phenomena. In particular it can be used to model light storage by introducing time dependence in Ω_c or light dragging due to spatial variation of Ω_c or Φ_1 .

2.3. Non-adiabatic corrections

In section 3 we shall consider the releasing of the stored light. For this we should include non-adiabatic corrections to the equation of motion (17). This can be done in the following way. From equation (4) expressing the bright state Φ_B and substituting equation (16) for Φ_0 we get

$$\Phi_B = -\frac{g\mathcal{E}}{\Omega_c}\Phi_1 + \Omega_c^{-1}(-i\partial_t + \omega_{01} - i\gamma)\Omega_c^{-1}(-i\partial_t + \delta)\Phi_B. \quad (18)$$

The term with the decay rate γ is larger than other non-adiabatic corrections in the above equation. Keeping in the non-adiabatic corrections only the terms proportional to the decay rate γ and neglecting, for simplicity, the two-photon detuning δ we obtain

$$\Phi_B \approx -\frac{g\mathcal{E}}{\Omega_c}\Phi_1 - \frac{\gamma}{\Omega_c^2}\partial_t\Phi_B. \quad (19)$$

The solution of this equation, assuming that the control beam is switched on suddenly at $t = 0$ and then changes slowly during the characteristic relaxation time γ/Ω_c^2 , is

$$\Phi_B = \Phi_B(0)e^{-\frac{\Omega_c^2}{\gamma}t} - \frac{g\mathcal{E}}{\Omega_c}\Phi_1(1 - e^{-\frac{\Omega_c^2}{\gamma}t}). \quad (20)$$

Using equations (16) and (20), the equation for the electric field (2) takes the form

$$\left(\partial_t - i\frac{c^2}{2\omega}\nabla^2 - i\frac{\omega}{2}\right)\mathcal{E} = -i\frac{g^2\Phi_1^*}{\Omega_c}(-i\partial_t + \delta) \times \frac{\Phi_1}{\Omega_c}\mathcal{E}(1 - e^{-\frac{\Omega_c^2}{\gamma}t}) + i\frac{g\Phi_1^*}{\Omega_c}(-i\partial_t + \delta)\Phi_B(0)e^{-\frac{\Omega_c^2}{\gamma}t}. \quad (21)$$

At $t = 0$ the probe field is off, and the information on the previously stored probe beam being contained in the atomic coherence $\Phi_B(0)$. The regeneration of the probe beam is described by the second term on the rhs of equation (21) representing the source for the electric field. Retaining only the temporal derivatives in equation (21), we get the equation describing the generation of the electric field:

$$\begin{aligned} & \left[1 + \frac{g^2 n}{\Omega_c^2} (1 - e^{-\frac{\Omega_c^2}{\gamma} t}) \right] \partial_t \mathcal{E} \\ &= -\frac{g \Phi_B^*}{\gamma} [g \Phi_1 \mathcal{E} + \Omega_c \Phi_B(0)] e^{-\frac{\Omega_c^2}{\gamma} t}, \end{aligned} \quad (22)$$

with the initial condition $\mathcal{E}(0) = 0$ at $t = 0$. For time in excess of the relaxation time γ / Ω_c^2 the regenerated probe field evolves to a steady state value complying with the adiabatic condition (12)

$$\mathcal{E} = -\frac{\Omega_c}{g \Phi_1} \Phi_B(0). \quad (23)$$

In this way, the regenerated electric field \mathcal{E} is indeed determined by the initial atomic coherence $\Phi_B(0)$. The subsequent evolution of the probe field is described by the adiabatic equation of motion (17) containing both the temporal and spatial derivatives subject to the initial condition (23).

2.4. Co-propagating control and probe beams

Suppose the probe and control beams co-propagate: $\mathcal{E}(\mathbf{r}, t) = \tilde{\mathcal{E}}(\mathbf{r}, t) e^{ikz}$, $\Omega_{c2}(\mathbf{r}, t) = \Omega_2(\mathbf{r}, t) e^{ik_{c2}z}$, $\Omega_{c3}(\mathbf{r}, t) = \Omega_3(\mathbf{r}, t) e^{ik_{c3}z}$, where k_{c2} and k_{c3} are the wavenumbers of the control beams. For paraxial beams the amplitudes $\tilde{\mathcal{E}}(\mathbf{r}, t)$, $\Omega_2(\mathbf{r}, t)$ and $\Omega_3(\mathbf{r}, t)$ depend weakly in the propagation direction z compared to the variation of the exponential factors. Equation (17) for the probe field takes then the form

$$\begin{aligned} & \partial_t \tilde{\mathcal{E}} + v_g \left[\frac{\partial}{\partial z} + \left(\frac{1}{v_g} - \frac{1}{c} \right) i\delta - i \frac{1}{2k} \nabla_{\perp}^2 \right] \tilde{\mathcal{E}} \\ &= \left(1 - \frac{v_g}{c} \right) \frac{\partial_t \Omega_c}{\Omega_c} \tilde{\mathcal{E}}, \end{aligned} \quad (24)$$

where we have replaced ∇^2 by its transverse part $\nabla_{\perp}^2 = \partial^2 / \partial x^2 + \partial^2 / \partial y^2$ because of the paraxial approximation. Here

$$v_g = c \left(1 + \frac{g^2 n}{\Omega_c^2} \right)^{-1} \quad (25)$$

is the radiative group velocity. The term with spatial derivative $\partial / \partial z$ in equation (24) describes the radiative propagation along the z axis with the group velocity v_g .

3. Storing and releasing the light

The probe beam $\mathcal{E}^{(s)}$ enters an atomic medium which is illuminated by two control beams characterized by the Rabi frequencies $\Omega_{c2}^{(s)}$ and $\Omega_{c3}^{(s)}$, where the index (s) refer to the stage of storing the light. At the boundary the probe beam is converted into a polariton propagating slowly in the medium with the velocity $v_g^{(s)} \ll c$. At certain time $t = t^{(s)}$, the whole probe pulse enters the atomic medium and is contained in it. Since the atomic population is created exclusively by the

incident light field, the atomic dark state Φ_D is not populated and, according to equation (12), the bright state is

$$\Phi_B^{(s)}(t^{(s)}) = -g \frac{\Phi_1}{\Omega_c^{(s)}} \mathcal{E}^{(s)}(t^{(s)}). \quad (26)$$

Equations (10) and (11) give the atomic fields:

$$\Phi_2^{(s)} = \xi_{c2}^{(s)*} \Phi_B^{(s)}, \quad \Phi_3^{(s)} = \xi_{c3}^{(s)*} \Phi_B^{(s)}. \quad (27)$$

To store the slow light, both control fields are switched off at $t = t^{(s)}$ in such a way that the ratios $\xi_{c2}^{(s)}$ and $\xi_{c3}^{(s)}$ remain constant whereas $\Omega_c^{(s)} \rightarrow 0$. The stored atomic coherences no longer have the radiative group velocity and thus are trapped in the medium. To restore the slow light propagation, the control fields are switched on again at $t = t^{(r)}$ with relative Rabi frequencies $\xi_{c2}^{(r)}$ and $\xi_{c3}^{(r)}$. The latter can differ from the original ones $\xi_{c2}^{(s)}$ and $\xi_{c3}^{(s)}$, so the dark state Φ_D can now be populated. Shortly after the beginning of the release of light (at $t = t^{(r)}$) the generated electric field reaches a steady state value, as described in the section 2.3. Equation (23) yields the restored probe field:

$$\mathcal{E}^{(r)}(t^{(r)}) = -\frac{\Omega_c^{(r)}}{g \Phi_1} (\xi_{c2}^{(r)} \xi_{c2}^{(s)*} + \xi_{c3}^{(r)} \xi_{c3}^{(s)*}) \Phi_B^{(s)}(t^{(s)}), \quad (28)$$

where equations (7), (15) and (27) were used to relate the bright state $\Phi_B^{(r)}(t^{(r)})$ of the restoring stage to the stored one $\Phi_B^{(s)}(t^{(s)})$.

Since a typical length of the atomic cloud is not much larger than the length of the laser pulse, we will assume that the stored and restored electric fields do not change significantly during their propagation inside the atomic cloud. Furthermore we will assume that the control beams are abruptly switched off during the storing stage and then switched on in the same way when they are restored. Using equations (12) and (28), the restored field may be written as:

$$\mathcal{E}^{(r)} = \frac{\Omega_c^{(r)}}{\Omega_c^{(s)}} (\xi_{c2}^{(r)} \xi_{c2}^{(s)*} + \xi_{c3}^{(r)} \xi_{c3}^{(s)*}) \mathcal{E}^{(s)}. \quad (29)$$

3.1. Control beams with the same spatial behavior

Suppose first that the Rabi frequencies of the restored control beams are proportional to the original ones: $\Omega_{c2}^{(r)} = a \Omega_{c2}^{(s)}$ and $\Omega_{c3}^{(r)} = a \Omega_{c3}^{(s)}$. For slow light this implies that $\xi_{c2}^{(r)} = \xi_{c2}^{(s)}$, $\xi_{c3}^{(r)} = \xi_{c3}^{(s)}$. Since $\xi_{c2} \xi_{c2}^* + \xi_{c3} \xi_{c3}^* = 1$, equation (29) yields the following result for the regenerated electric field:

$$\mathcal{E}^{(r)}(t^{(r)}) = -\frac{\Omega_c^{(r)}}{g \Phi_1} \Phi_B^{(s)}(t^{(s)}). \quad (30)$$

The above relationship represents the initial condition for the subsequent propagation of the probe beam \mathcal{E} governed by the equation of motion (24). The regenerated electric field is seen to acquire the phase from the bright polariton at its storage stage and the amplitude of \mathcal{E} is modulated according to $\Omega_c^{(r)}$ at the release stage.

3.2. Transfer of optical vortex at the retrieval of the probe beam

Suppose now that initially we have a Λ system with only a single control field: $\xi_{c3}^{(s)} = 0$ and hence $|\xi_{c2}^{(s)}| = 1$. On the other hand, a tripod system is used in the retrieval stage where generally both $\xi_{c2}^{(r)}$ and $\xi_{c3}^{(r)}$ are non-zero. In that case equation (28) provides the following result for the regenerated electric field:

$$\mathcal{E}^{(r)}(t^{(r)}) = -\frac{\Omega_{c2}^{(r)}}{g\Phi_1} \xi_{c2}^{(s)*} \Phi_B^{(s)}(t^{(s)}). \quad (31)$$

The equation (31) represents the initial condition for the subsequent propagation of the probe beam \mathcal{E} governed by the equation of motion (24) in the medium.

If the second control beam has an optical vortex at the restoring stage $\Omega_{c2}^{(r)} \sim e^{i\ell\varphi}$, the regenerated electric field $\mathcal{E}^{(r)} \sim e^{i\ell\varphi}$ acquires the same phase, as one can see from equation (31). This means the restoring control beam transfers its optical vortex to the regenerated electric field $\mathcal{E}^{(r)}$. In the Λ scheme it is not allowed to have an optical vortex for the control beam due to adiabaticity violation at the center of the vortex. Using a tripod scheme for the regeneration lifts up this restriction. The probe beam may itself carry a vortex at the beginning of the storage [44]. Subsequently the vortex is stored onto the atomic bright state $\Phi_B^{(s)}$ and then transferred back to the probe beam after the control beam $\Omega_{c2}^{(r)}$ is turned on. In that case the phase of the restored vortex in the probe beam is defined by the product $\Omega_{c2}^{(r)} \Phi_B^{(s)}$ in which both $\Omega_{c2}^{(r)}$ and $\Phi_B^{(s)}$ may carry vortices. If these vortices have opposite winding numbers, they cancel each other, leading to zero vorticity in the regenerated probe beam.

Let us take the restoring control laser $\Omega_{c2}^{(r)}$ to be the first-order Laguerre–Gaussian (LG) beam: $\Omega_{c2}^{(r)} = A\tilde{\rho}e^{i\varphi} \exp(-\tilde{\rho}^2/\sigma_r^2)$, where $\tilde{\rho} = \rho/\lambda$ is a dimensionless cylindrical radius, $\lambda = 2\pi/k$ being the optical wavelength. On the other hand, the control beam is assumed to be the zero-order LG beam during the storage stage involving a Λ system: $\Omega_{c2}^{(s)} = a^{-1}A \exp(-\tilde{\rho}^2/\sigma_s^2)$, where a determines a relative amplitude of the control fields $\Omega_{c2}^{(r)}$ and $\Omega_{c2}^{(s)}$, σ_r and σ_s being their dimensionless widths. This provides the following regenerated probe field (31)

$$\mathcal{E}^{(r)} = a\tilde{\rho}e^{i\varphi} \exp[-\tilde{\rho}^2(\sigma_r^{-2} - \sigma_s^{-2})]\mathcal{E}^{(s)}. \quad (32)$$

3.3. Transfer of the optical vortex during the storage of slow light

Suppose now that initially we have a tripod system for the storage where generally both $\xi_{c2}^{(s)}$ and $\xi_{c3}^{(s)}$ are non-zero. On the other hand, a Λ system is used in the retrieval stage with only one control field, i.e. $\xi_{c3}^{(r)} = 0$ and hence $|\xi_{c2}^{(r)}| = 1$. In that case equation (28) leads to the same equation (31) for the regenerated electric field. Yet now it is the storing control beam that has an optical vortex $\Omega_{c2}^{(s)} \sim e^{i\ell\varphi}$. Subsequently the vortex is transferred to the regenerated probe field in the phase conjugated form: $\mathcal{E}^{(r)} \sim e^{-i\ell\varphi}$.

Suppose that the control lasers are the first and zero-order LG beams at the storage stage:

$$\Omega_{c2}^{(s)} = A\tilde{\rho}e^{i\varphi} \exp(-\tilde{\rho}^2/\sigma_s^2), \quad \Omega_{c3}^{(s)} = bA \exp(-\tilde{\rho}^2/\sigma_s^2), \quad (33)$$

where the parameter b determines the relative amplitude of the additional control laser. On the other hand, the control beam is assumed to be the zero-order LG beam at the retrieval stage involving the Λ scheme: $\Omega_{c2}^{(r)} = aA \exp(-\tilde{\rho}^2/\sigma_r^2)$. Thus one arrives at the following regenerated probe field containing the phase conjugated vortex

$$\mathcal{E}^{(r)} = \frac{a}{\tilde{\rho}^2 + b^2} \tilde{\rho}e^{-i\varphi} \exp[-\tilde{\rho}^2(\sigma_r^{-2} - \sigma_s^{-2})]\mathcal{E}^{(s)}. \quad (34)$$

3.4. Energy losses

The proposed schemes for transferring a vortex from the control laser beam to the regenerated probe beam avoid non-adiabatic (absorption) losses at the center of the vortex due to application of an additional control laser. Yet there is another kind of loss in the energy of the regenerated probe beam, because a part of the stored probe beam remains frozen in the medium in the form of atomic spin excitations. Let us estimate those losses. Suppose that the incident pulse of the probe electric field $\mathcal{E}^{(s)}$ has a Gaussian intensity profile with a width σ_p along its transverse coordinate $\tilde{\rho}$ and a length L_{vac} in the propagation direction z . The total electric field energy entering the cloud of cold atoms is

$$W_{(s)} = 2\pi \int_0^{+\infty} \tilde{\rho} d\tilde{\rho} \int_0^{L_{vac}} dz |\mathcal{E}^{(s)}|^2 = \frac{\pi}{2} L_{vac} |\mathcal{E}_0|^2 \sigma_p^2. \quad (35)$$

The electric probe field at the retrieval stage is related to that stored in a different way for the two cases of the storage and retrieval considered above.

In the case of lambda storage and tripod retrieval, the regenerated electric field is described by equation (32). The length of the regenerated pulse is $L_{(r)}$. This length is related to the length L_{vac} of the initial pulse via the equation $L_{(r)} = L_{vac} v_g^{(s)}/v_g^{(r)}$. Since the group velocity $v_g^{(r)}$ in the retrieval stage depends on the transverse coordinate $\tilde{\rho}$, the length $L_{(r)}$ is also $\tilde{\rho}$ dependent. The total energy of the electric field leaving the cloud is

$$\begin{aligned} W_{(r)} &= 2\pi \int_0^{+\infty} \tilde{\rho} d\tilde{\rho} \int_0^{L_{(r)}} dz |\mathcal{E}^{(r)}|^2 \\ &= \pi L_{vac} |\mathcal{E}_0|^2 \int_0^{+\infty} \frac{x \exp[-2x(\sigma_r^{-2} + \sigma_p^{-2})]}{x \exp(-2x/\sigma_r^2) + b^2 \exp(-2x/\sigma_{r3}^2)} dx. \end{aligned} \quad (36)$$

Here σ_{r3} is the width of the second control beam at the retrieval stage $\Omega_{c3}^{(r)} = bA \exp(-\tilde{\rho}^2/\sigma_{r3}^2)$. The energy losses may be found by comparing the energies of the pulses before and after the interaction with the cloud. For simplicity suppose that $\sigma_r = \sigma_{r3}$. Then

$$\begin{aligned} \frac{W_{(r)}}{W_{(s)}} &= \int_0^{+\infty} \frac{e^{-y}}{y + 2b^2/\sigma_p^2} y dy \\ &= 1 + \frac{2b^2}{\sigma_p^2} \exp\left(\frac{2b^2}{\sigma_p^2}\right) \text{Ei}\left(-\frac{2b^2}{\sigma_p^2}\right). \end{aligned} \quad (37)$$

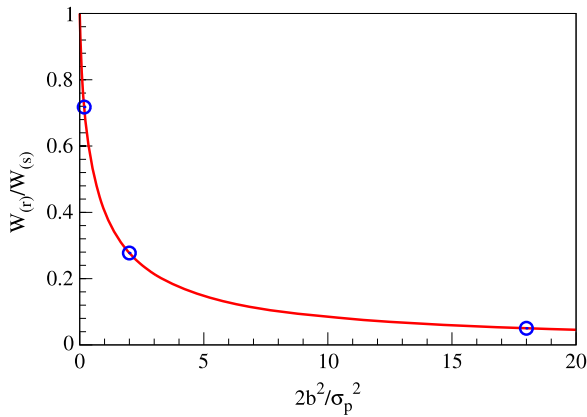


Figure 2. The dependence of losses on the relative amplitude ratio between the control beams b calculated using equation (37). The three circles indicate three cases corresponding to $\sigma_p = 10$ and $b = 3, 10$ and 30 .

If the intensity of the second control beam is large, $b \gg \sigma_p$, the ratio of the energies is $W_{(r)}/W_{(s)} \approx \sigma_p^2/(2b^2)$.

In the case of tripod storage and lambda retrieval the restored electric field profile is described by equation (34). Nevertheless the losses are found the same as in the previous case (37). Several values of $W_{(r)}/W_{(s)}$ are given in figure 2. When the amplitude ratio of the control beams b increases, the losses are seen to increase.

4. Concluding remarks

We have considered propagation, storing and retrieval of slow light (probe beam) in a resonant atomic medium illuminated by two control laser beams of larger intensity. The probe and two control beams act on atoms in a tripod configuration of light-matter coupling in which three hyperfine atomic ground states and one excited state are involved. The first control beam is allowed to have an orbital angular momentum (OAM). Application of the second vortex-free control laser ensures the adiabatic (lossless) propagation of the probe beam at the vortex core where the intensity of the first control laser goes to zero. Using the adiabatic approximation we have derived the equation of motion for the probe beam and analyzed it in the case where one of the control beams has an optical vortex.

Storing and release of the probe beam is accomplished by switching off and on the control laser beams leading to the transfer of the optical vortex from the first control beam to the regenerated probe field. A part of the stored probe beam remains frozen in the atomic cloud in the form of spin excitations, a number of which increases with increasing intensity of the second control laser. We have analyzed such losses in the regenerated probe beam and provided conditions for the optical vortex of the control beam to be transferred efficiently to the restored probe beam.

We have investigated in detail two cases of storing and retrieval of optical vortices onto the atomic medium. In the first case the Λ scheme is used for the storage, whereas the tripod setup is exploited for the retrieval. In such a situation the vortex can be transferred efficiently and without distortion

from the restoring control beam to the regenerated probe beam. In the second case the tripod system is used for the storing and the Λ system is employed for the retrieval. The vortex is then transferred from the storing control beam to the regenerated probe in a phase conjugated form, so the regenerated probe beam acquires an opposite vorticity. The regenerated beam is then distorted and becomes narrower as compared to the storing beam. Thus it experiences a larger diffraction spreading in the subsequent propagation in the medium.

Acknowledgments

The authors acknowledge the support by the Research Council of Lithuania (Grants No. MOS-2/2010 and VP1-3.1-ŠMM-01-V-01-001).

References

- [1] Hau L V, Harris S E, Dutton Z and Behroozi C H 1999 Light speed reduction to 17 m s^{-1} in an ultracold atomic gas *Nature* **397** 594
- [2] Kash M M, Sautenkov V A, Zibrov A S, Hollberg L, Welch G R, Lukin M D, Rostovtsev Y, Fry E S and Scully M O 1999 Ultraslow group velocity and enhanced nonlinear optical effects in a coherently driven hot atomic gas *Phys. Rev. Lett.* **82** 5229
- [3] Budker D, Kimball D F, Rochester S M and Yashchuk V V 1999 Nonlinear magneto-optics and reduced group velocity of light in atomic vapor with slow ground state relaxation *Phys. Rev. Lett.* **83** 1767
- [4] Novikova I, Phillips D F and Walsworth R L 2007 Slow light with integrated gain and large pulse delay *Phys. Rev. Lett.* **99** 173604
- [5] Firstenberg O, London P, Shuker M, Ron A and Davidson N 2009 Elimination, reversal and directional bias of optical diffraction *Nat. Phys.* **5** 665
- [6] Fleischhauer M and Lukin M D 2000 Dark-state polaritons in electromagnetically induced transparency *Phys. Rev. Lett.* **84** 5094
- [7] Liu C, Dutton Z, Behroozi C H and Hau L V 2001 Observation of coherent optical information storage in an atomic medium using halted light pulses *Nature* **409** 490
- [8] Phillips D F, Fleischhauer A, Mair A, Walsworth R L and Lukin M D 2001 Storage of light in atomic vapor *Phys. Rev. Lett.* **86** 783
- [9] Juzeliūnas G and Carmichael H J 2002 Systematic formulation of slow polaritons in atomic gases *Phys. Rev. A* **65** 021601
- [10] Zibrov A S, Matsko A B, Kocharovskaya O, Rostovtsev Y V, Welch G R and Scully M O 2002 Transporting and time reversing light via atomic coherence *Phys. Rev. Lett.* **88** 103601
- [11] Yanik M F and Fan S 2005 Stopping and storing light coherently *Phys. Rev. A* **71** 013803
- [12] Nikoghosyan G 2005 Storage and perpendicular retrieving of light pulses in electromagnetically induced transparency media *Eur. Phys. J. D* **36** 119
- [13] Eisaman M D, André A, Massou F, Fleischhauer M, Zibrov A S and Lukin M D 2005 Electromagnetically induced transparency with tunable single-photon pulses *Nature* **438** 837
- [14] Guan P-C, Chen Y-F and Yu I A 2007 Role of degenerate zeeman states in the storage and retrieval of light pulses *Phys. Rev. A* **75** 013812
- [15] Ginsberg N S, Garner S R and Hau L V 2007 Coherent control of optical information with matter wave dynamics *Nature* **445** 623

- [16] Schnorrberger U, Thompson J D, Trotzky S, Pugatch R, Davidson N, Kuhr S and Bloch I 2009 Electromagnetically induced transparency and light storage in an atomic Mott insulator *Phys. Rev. Lett.* **103** 033003
- [17] Zhang R, Garner S R and Hau L V 2009 Creation of long-term coherent optical memory via controlled nonlinear interactions in Bose–Einstein condensates *Phys. Rev. Lett.* **103** 233602
- [18] Beil F, Buschbeck M, Heinze G and Halfmann T 2010 Light storage in a doped solid enhanced by feedback-controlled pulse shaping *Phys. Rev. A* **81** 053801
- [19] Bajcsy M, Zibrov A S and Lukin M D 2003 Stationary pulses of light in an atomic medium *Nature* **426** 638
- [20] Moiseev S A and Ham B S 2006 Quantum manipulation of two-color stationary light: quantum wavelength conversion *Phys. Rev. A* **73** 033812
- [21] Fleischhauer M, Otterbach J and Unanyan R G 2008 Bose–Einstein condensation of stationary-light polaritons *Phys. Rev. Lett.* **101** 163601
- [22] Zimmer F E, Otterbach J, Unanyan R G, Shore B W and Fleischhauer M 2008 Dark-state polaritons for multicomponent and stationary light fields *Phys. Rev. A* **77** 063823
- [23] Lin Y-W, Liao W-T, Peters T, Chou H-C, Wang J-S, Cho H-W, Kuan P-C and Yu I A 2009 Stationary light pulses in cold atomic media and without Bragg gratings *Phys. Rev. Lett.* **102** 213601
- [24] Otterbach J, Ruseckas J, Unanyan R G, Juzeliūnas G and Fleischhauer M 2010 Effective magnetic fields for stationary light *Phys. Rev. Lett.* **104** 033903
- [25] Unanyan R G, Otterbach J, Fleischhauer M, Ruseckas J, Kudriašov V and Juzeliūnas G 2010 Spinor slow-light and Dirac particles with variable mass *Phys. Rev. Lett.* **105** 173603
- [26] Arimondo E 1996 *Progress in Optics* (Amsterdam: Elsevier)
- [27] Harris S E 1997 Electromagnetically induced transparency *Phys. Today* **50** 36
- [28] Scully M O and Zubairy M S 1997 *Quantum Optics* (Cambridge: Cambridge University Press)
- [29] Lukin M D 2003 Colloquium: trapping and manipulating photon states in atomic ensembles *Rev. Mod. Phys.* **75** 457
- [30] Fleischhauer M, Imamoglu A and Marangos J P 2005 Electromagnetically induced transparency: optics in coherent media *Rev. Mod. Phys.* **77** 633
- [31] Appel J, Figueroa E, Korystov D, Lobino M and Lvovsky A I 2008 Quantum memory for squeezed light *Phys. Rev. Lett.* **100** 093602
- [32] Honda K, Akamatsu D, Arikawa M, Yokoi Y, Akiba K, Nagatsuka S, Tanimura T, Furusawa A and Kozuma M 2008 Storage and retrieval of a squeezed vacuum *Phys. Rev. Lett.* **100** 093601
- [33] Akiba K, Kashiwagi K, Arikawa M and Kozuma M 2009 Storage and retrieval of nonclassical photon pairs and conditional single photons generated by the parametric down-conversion process *New J. Phys.* **11** 013049
- [34] Leonhardt U and Pivnicki P 2000 Relativistic effects of light in moving media with extremely low group velocity *Phys. Rev. Lett.* **84** 822
- [35] Öhberg P 2002 Slow light and the phase of a Bose–Einstein condensate *Phys. Rev. A* **66** 021603
- [36] Fleischhauer M and Gong S 2002 Stationary source of nonclassical or entangled atoms *Phys. Rev. Lett.* **88** 070404
- [37] Juzeliūnas G, Mašalas M and Fleischhauer M 2003 Storing and releasing light in a gas of moving atoms *Phys. Rev. A* **67** 023809
- [38] Artoni M and Carusotto I 2003 *In situ* velocity imaging of ultracold atoms using slow light *Phys. Rev. A* **67** 011602
- [39] Zimmer F and Fleischhauer M 2004 Sagnac interferometry based on ultraslow polaritons in cold atomic vapors *Phys. Rev. Lett.* **92** 253201
- [40] Padgett M, Whyte G, Girkin J, Wright A, Allen L, Öhberg P and Barnett S M 2006 Polarization and image rotation induced by a rotating dielectric rod: an optical angular momentum interpretation *Opt. Lett.* **31** 2205
- [41] Ruseckas J, Juzeliūnas G, Öhberg P and Barnett S M 2007 Polarization rotation of slow light with orbital angular momentum in ultracold atomic gases *Phys. Rev. A* **76** 053822
- [42] Allen L, Padgett M J and Babiker M 1999 The orbital angular momentum of light *Prog. Opt.* **39** 291
- [43] Allen L, Barnett S M and Padgett M J 2003 *Optical Angular Momentum* (Bristol: Institute of Physics Publishing)
- [44] Dutton Z and Ruostekoski J 2004 Transfer and storage of vortex states in light and matter waves *Phys. Rev. Lett.* **93** 193602
- [45] Pugatch R, Shuker M, Firstenberg O, Ron A and Davidson N 2007 Topological stability of stored optical vortices *Phys. Rev. Lett.* **98** 203601
- [46] Wang T, Zhao L, Jiang L and Yelin S F 2008 Diffusion-induced decoherence of stored optical vortices *Phys. Rev. A* **77** 043815
- [47] Moretti D, Felinto D and Tabosa J W R 2009 Collapses and revivals of stored orbital angular momentum of light in a cold-atom ensemble *Phys. Rev. A* **79** 023825
- [48] Unanyan R, Fleischhauer M, Shore B W and Bergmann K 1998 Robust creation and phase-sensitive probing of superposition states via stimulated Raman adiabatic passage (STIRAP) with degenerate dark states *Opt. Commun.* **155** 144
- [49] Paspalakis E and Knight P L 2002 Electromagnetically induced transparency and controlled group velocity in a multilevel system *Phys. Rev. A* **66** 015802
- [50] Rebic S, Vitali D, Ottaviani C, Tombesi P, Artoni M, Cataliotti F and Corbalán R 2004 Polarization phase gate with a tripod atomic system *Phys. Rev. A* **70** 032317
- [51] Petrosyan D and Malakyan Y P 2004 Magneto-optical rotation and cross-phase modulation via coherently driven four-level atoms in a tripod configuration *Phys. Rev. A* **70** 023822
- [52] Wang T, Kostrun M and Yelin S F 2004 Multiple beam splitter for single photons *Phys. Rev. A* **70** 053822
- [53] Ruseckas J, Juzeliūnas G, Öhberg P and Fleischhauer M 2005 Non-abelian gauge potentials for ultracold atoms with degenerate dark states *Phys. Rev. Lett.* **95** 010404
- [54] Mazets I E 2005 Adiabatic pulse propagation in coherent atomic media with the tripod level configuration *Phys. Rev. A* **71** 023806
- [55] Raczynski A, Rzepecka M, Zaremba J and Zielinska-Kaniasty S 2006 Polariton picture of light propagation and storing in a tripod system *Opt. Commun.* **260** 73
- [56] Raczynski A, Zaremba J and Zielinska-Kaniasty S 2007 Beam splitting and Hong–Ou–Mandel interference for stored light *Phys. Rev. A* **75** 013810
- [57] Raczynski A, Slowik K, Zaremba J and Zielinska-Kaniasty S 2007 Controlling statistical properties of stored light *Opt. Commun.* **279** 324–9
- [58] Gavra N, Rosenbluh M, Zigdon T, Wilson-Gordon A D and Friedmann H 2007 Sub-Doppler and sub-natural narrowing of an absorption line *Opt. Commun.* **280** 374
- [59] Ruseckas J, Mekys A and Juzeliūnas G 2010 Manipulation of slow light with orbital angular momentum in cold atomic gases *Opt. Spectrosc.* **108** 438
- [60] Juzeliūnas G, Öhberg P, Ruseckas J and Klein A 2005 Effective magnetic fields in degenerate atomic gases induced by light beams with orbital angular momenta *Phys. Rev. A* **71** 053614